




# Tesi3

Multicoloumn tubolar radiator Tesi

Its timeless good looks, elegant and harmonious profile, give TESI great versatility for use in both classical and modern settings. High thermal yield thanks to the considerable water content and the large radiating surface are the characteristics that make TESI ideal for use with the most modern low-temperature systems.

### Technical features:

- tubes made of 25 mm diameter sheet steel
- manifolds made of pressed sheet steel
- elements 45 mm long (element pitch)
- threading 1"1/4 G right and left on top and bottom manifold
- maximum working pressure 8 bar
- maximum working temperature 95°C

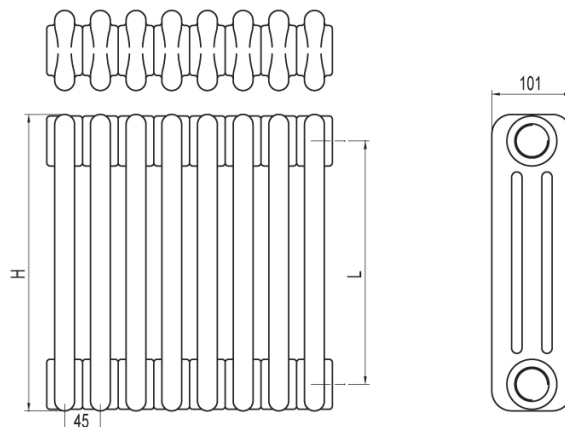

Modello	Codice	Prof. mm	Altezza mm	Interass . mm	Peso mm	Cal. lt	Watt dt=50°C	Watt dt=40°C	Watt dt=30°C	Watt dt=20°C	Esp.n.
200	RT30200 yy 01 AA 02	101	194	127	0.41	0.46	20	15	10	6	1.288
300	RT30300 yy 01 AA 02	101	302	235	0.60	0.60	32	25	17	10	1.248
350	RT30350 yy 01 AA 02	101	352	285	0.72	0.76	37	28	20	12	1.254
365	RT30365 yy 01 AA 02	101	367	300	0.75	0.68	39	29	20	12	1.255
400	RT30400 yy 01 AA 02	101	402	335	0.78	0.72	42	32	22	13	1.259
450	RT30450 yy 01 AA 02	101	452	385	0.91	0.78	47	35	24	15	1.265
500	RT30500 yy 01 AA 02	101	502	435	0.96	0.85	51	39	27	16	1.270
550	RT30550 yy 01 AA 02	101	552	485	1.11	0.90	56	42	29	17	1.275
565	RT30565 yy 01 AA 02	101	567	500	1.07	0.93	57	43	30	18	1.277
600	RT30600 yy 01 AA 02	101	602	535	1.14	0.97	61	46	32	19	1.281
650	RT30650 yy 01 AA 02	101	652	585	1.30	1.03	65	49	34	20	1.286
750	RT30750 yy 01 AA 02	101	752	685	1.40	1.16	74	56	38	23	1.297
900	RT30900 yy 01 AA 02	101	902	835	1.67	1.35	88	66	45	26	1.314
1000	RT31000 yy 01 AA 02	101	1002	935	1.85	1.47	97	72	49	29	1.317
1200	RT31200 yy 01 AA 02	101	1202	1135	2.37	1.70	115	85	58	34	1.322
1500	RT31500 yy 01 AA 02	101	1502	1435	2.95	2.07	142	105	72	42	1.330
1800	RT31800 yy 01 AA 02	101	1802	1735	3.54	2.43	169	126	86	50	1.325
2000	RT32000 yy 01 AA 02	101	2002	1935	3.93	2.68	187	140	96	56	1.318
2200	RT32200 yy 01 AA 02	101	2202	2135	4.32	2.97	206	154	105	62	1.310
2500	RT32500 yy 01 AA 02	101	2502	2435	4.90	3.29	234	175	120	71	1.299
200	RT30200 yy 01 AA 02	101	194	127	0.41	0.46	20	15	10	6	1.288
300	RT30300 yy 01 AA 02	101	302	235	0.60	0.60	32	25	17	10	1.248
350	RT30350 yy 01 AA 02	101	352	285	0.72	0.76	37	28	20	12	1.254
365	RT30365 yy 01 AA 02	101	367	300	0.75	0.68	39	29	20	12	1.255
400	RT30400 yy 01 AA 02	101	402	335	0.78	0.72	42	32	22	13	1.259
450	RT30450 yy 01 AA 02	101	452	385	0.91	0.78	47	35	24	15	1.265
500	RT30500 yy 01 AA 02	101	502	435	0.96	0.85	51	39	27	16	1.270
550	RT30550 yy 01 AA 02	101	552	485	1.11	0.90	56	42	29	17	1.275

565	RT30565 yy 01 AA 02	101	567	500	1.07	0.93	57	43	30	18	1.277
600	RT30600 yy 01 AA 02	101	602	535	1.14	0.97	61	46	32	19	1.281
650	RT30650 yy 01 AA 02	101	652	585	1.30	1.03	65	49	34	20	1.286
750	RT30750 yy 01 AA 02	101	752	685	1.40	1.16	74	56	38	23	1.297
900	RT30900 yy 01 AA 02	101	902	835	1.67	1.35	88	66	45	26	1.314
1000	RT31000 yy 01 AA 02	101	1002	935	1.85	1.47	97	72	49	29	1.317
1200	RT31200 yy 01 AA 02	101	1202	1135	2.37	1.70	115	85	58	34	1.322
1500	RT31500 yy 01 AA 02	101	1502	1435	2.95	2.07	142	105	72	42	1.330
1800	RT31800 yy 01 AA 02	101	1802	1735	3.54	2.43	169	126	86	50	1.325
2000	RT32000 yy 01 AA 02	101	2002	1935	3.93	2.68	187	140	96	56	1.318
2200	RT32200 yy 01 AA 02	101	2202	2135	4.32	2.97	206	154	105	62	1.310
2500	RT32500 yy 01 AA 02	101	2502	2435	4.90	3.29	234	175	120	71	1.299

For dt different from 50°C use the formula:  $Q=Q_n (dt / 50)^n$