




Tesi4

Multicoloumn tubolar radiator Tesi

Its timeless good looks, elegant and harmonious profile, give TESI great versatility for use in both classical and modern settings. High thermal yield thanks to the considerable water content and the large radiating surface are the characteristics that make TESI ideal for use with the most modern low-temperature systems.

Technical features:

- tubes made of 25 mm diameter sheet steel
- manifolds made of pressed sheet steel
- elements 45 mm long (element pitch)
- threading 1"1/4 G right and left on top and bottom manifold
- maximum working pressure 8 bar
- maximum working temperature 95°C

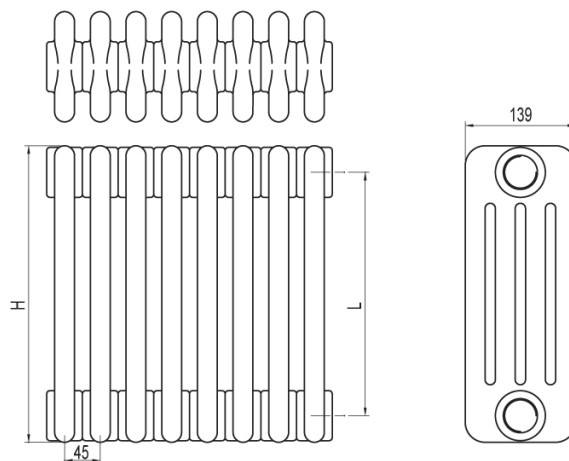

Modello	Codice	Prof. mm	Altezza mm	Interass . mm	Peso mm	Cal. lt	Watt dt=50°C	Watt dt=40°C	Watt dt=30°C	Watt dt=20°C	Esp.n.
200	RT40200 yy 01 AA 02	139	194	133	0.57	0.60	26	19	13	8	1.326
300	RT40300 yy 01 AA 02	139	302	235	0.83	0.78	42	32	22	13	1.258
350	RT40350 yy 01 AA 02	139	352	285	0.98	0.86	48	36	25	15	1.265
365	RT40365 yy 01 AA 02	139	367	300	1.02	0.88	50	38	26	16	1.267
400	RT40400 yy 01 AA 02	139	402	335	1.06	0.95	55	41	28	17	1.272
450	RT40450 yy 01 AA 02	139	452	385	1.24	1.02	61	46	32	19	1.279
500	RT40500 yy 01 AA 02	139	502	435	1.30	1.11	67	50	35	21	1.286
550	RT40550 yy 01 AA 02	139	552	485	1.50	1.18	73	55	38	22	1.293
565	RT40565 yy 01 AA 02	139	567	500	1.46	1.22	75	56	39	23	1.296
600	RT40600 yy 01 AA 02	139	602	535	1.54	1.28	79	59	41	24	1.300
650	RT40650 yy 01 AA 02	139	652	585	1.76	1.35	85	64	44	26	1.307
750	RT40750 yy 01 AA 02	139	752	685	1.89	1.53	97	72	49	29	1.322
900	RT40900 yy 01 AA 02	139	902	835	2.25	1.78	114	85	58	33	1.343
1000	RT41000 yy 01 AA 02	139	1002	935	2.49	1.94	126	93	64	37	1.340
1200	RT41200 yy 01 AA 02	139	1202	1135	3.18	2.25	149	110	75	44	1.335
1500	RT41500 yy 01 AA 02	139	1502	1435	3.96	2.74	183	136	93	54	1.328
1800	RT41800 yy 01 AA 02	139	1802	1735	4.74	3.23	216	161	110	64	1.321
2000	RT42000 yy 01 AA 02	139	2002	1935	5.26	3.55	238	178	122	71	1.317
2200	RT42200 yy 01 AA 02	139	2202	2135	5.78	3.88	260	194	133	78	1.312
2500	RT42500 yy 01 AA 02	139	2502	2435	6.55	4.37	293	219	150	88	1.306
200	RT40200 yy 01 AA 02	139	194	133	0.57	0.60	26	19	13	8	1.326
300	RT40300 yy 01 AA 02	139	302	235	0.83	0.78	42	32	22	13	1.258
350	RT40350 yy 01 AA 02	139	352	285	0.98	0.86	48	36	25	15	1.265
365	RT40365 yy 01 AA 02	139	367	300	1.02	0.88	50	38	26	16	1.267
400	RT40400 yy 01 AA 02	139	402	335	1.06	0.95	55	41	28	17	1.272
450	RT40450 yy 01 AA 02	139	452	385	1.24	1.02	61	46	32	19	1.279
500	RT40500 yy 01 AA 02	139	502	435	1.30	1.11	67	50	35	21	1.286
550	RT40550 yy 01 AA 02	139	552	485	1.50	1.18	73	55	38	22	1.293

565	RT40565 yy 01 AA 02	139	567	500	1.46	1.22	75	56	39	23	1.296
600	RT40600 yy 01 AA 02	139	602	535	1.54	1.28	79	59	41	24	1.300
650	RT40650 yy 01 AA 02	139	652	585	1.76	1.35	85	64	44	26	1.307
750	RT40750 yy 01 AA 02	139	752	685	1.89	1.53	97	72	49	29	1.322
900	RT40900 yy 01 AA 02	139	902	835	2.25	1.78	114	85	58	33	1.343
1000	RT41000 yy 01 AA 02	139	1002	935	2.49	1.94	126	93	64	37	1.340
1200	RT41200 yy 01 AA 02	139	1202	1135	3.18	2.25	149	110	75	44	1.335
1500	RT41500 yy 01 AA 02	139	1502	1435	3.96	2.74	183	136	93	54	1.328
1800	RT41800 yy 01 AA 02	139	1802	1735	4.74	3.23	216	161	110	64	1.321
2000	RT42000 yy 01 AA 02	139	2002	1935	5.26	3.55	238	178	122	71	1.317
2200	RT42200 yy 01 AA 02	139	2202	2135	5.78	3.88	260	194	133	78	1.312
2500	RT42500 yy 01 AA 02	139	2502	2435	6.55	4.37	293	219	150	88	1.306

For dt different from 50°C use the formula: $Q=Q_n (dt / 50)^n$